



INSTRUCTION BULLETIN

No. 340095
Machine: 4300
Published: 4-99/01
System: OPTIONS

NOTE: DO NOT DISCARD the Parts List from the Instruction Bulletin. Place the Parts List in the appropriate place in your machine manual for future reference. Retaining the Parts List will make it easier to reorder individual parts and will save you the cost of ordering an entire kit.

NOTE: Numbers in parenthesis () are reference numbers for parts listed in Bill of Materials.

Installation instructions for kit number 367381

SYNOPSIS / PROBLEM:

This kit contains the parts needed to install a trailer hitch on the model 4300 sweeper.
Please follow step-by-step instructions.

SPECIAL TOOLS / CONSIDERATIONS: NONE

(Estimated time to complete: 1/2 hour)

PREPARATION:

(Refer to FIG. 1)

FOR SAFETY: Before leaving or servicing machine, stop on level surface and set parking brake. Then turn off machine and remove key.

INSTALLATION:

(Refer to FIG. 1)

1. Insert trailer hitch flat bar (1) in rear bumper of machine. (Refer to FIG. 1)
2. Slide flat bar (1) into slot in rear of machine and secure with clevis pin (2). (Refer to FIG. 1)
3. Secure clevis pin with hair cotter pin (3). (Refer to FIG. 1)
4. Attach hitch ball (4) using nut provided. Torque to 175 to 228 Nm (129 to 168 ft lb.).
(Refer to FIG. 1)

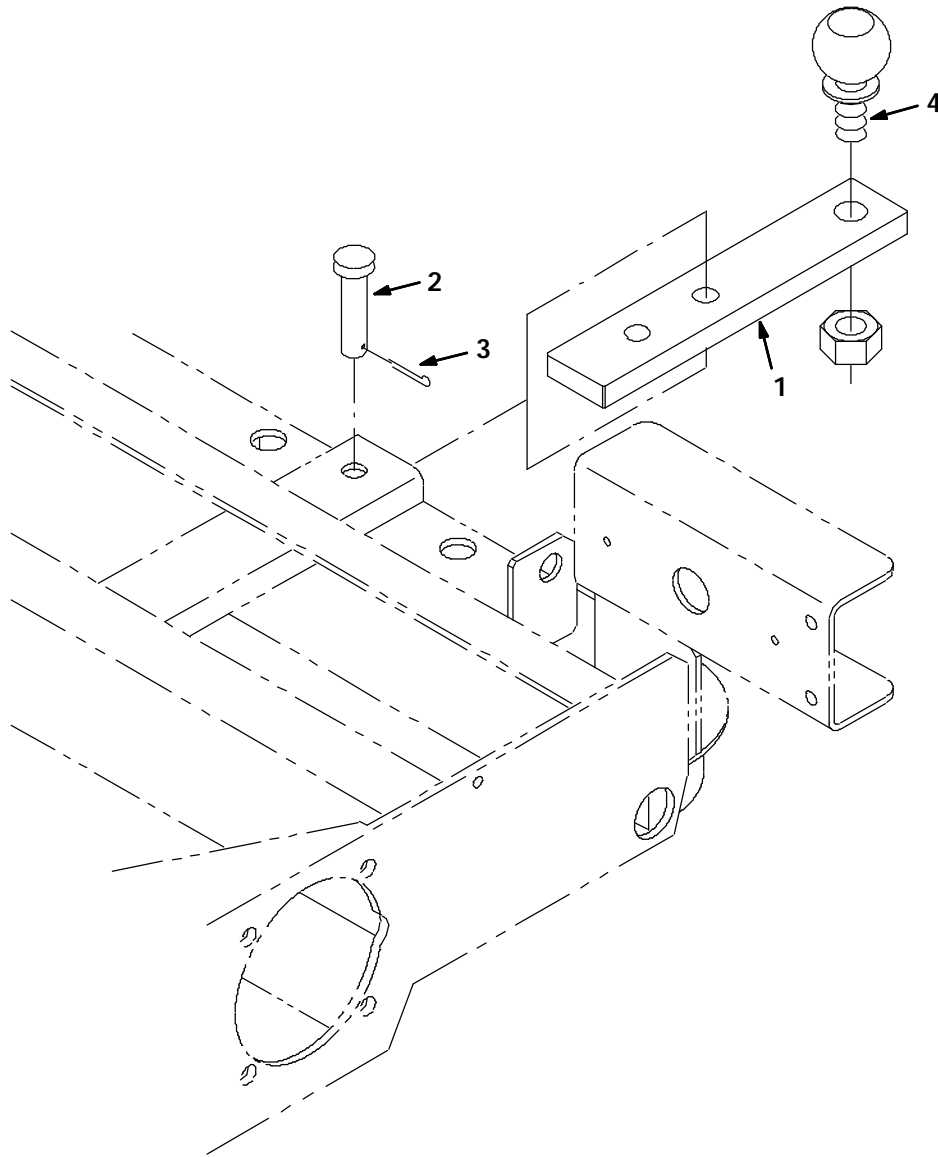


FIG. 1 - TRAILER HITCH KIT INSTALLATION

BILL OF MATERIALS FOR TRAILER HITCH KIT 367381

Ref.	TENNANT Part No.	Description	Qty.
1	367368	Flat bar	1
2	01272	Clevis pin	1
3	02942	Hair pin	1
4	368316	Hitch ball	1

TENNANT COMPANY
P. O. Box 1452
Minneapolis, MN 55440-1452