



Timer Bypass Kit

Models: E5, Speed Ex



This kit is intended for models equipped with timers. The timer has been discontinued and replaced by this kit. To repair a machine with a defective timer, follow the below instructions.

INSTALLATION INSTRUCTIONS:

Installation Time: 0.5 Hours

TOOLS REQUIRED: Philips Screwdriver, 8mm Socket Wrench.


FOR SAFETY: Before installing kit, unplug power cord from wall outlet.

Kit Contents

P/N	Description	Qty
130133	Terminal, Mal, .25 22- 18GA Red	3
9011406	Instructions, Timer, Remove, [E5/Speed Ex]	

1. Unplug power cord from wall outlet.
2. Remove rear panel from machine.
3. Disconnect wires from timer and remove timer.
4. Disconnect RED 1 wire jumper from circuit breaker and dispose.
5. Add male terminals to open female wire terminals (Brown 2D, Blue 6D and Brown 2C).
6. Reconnect RED 11 wire to circuit breaker (CB).
7. Secure wiring with zip- ties.
8. Reinstall rear cover.

BEFORE

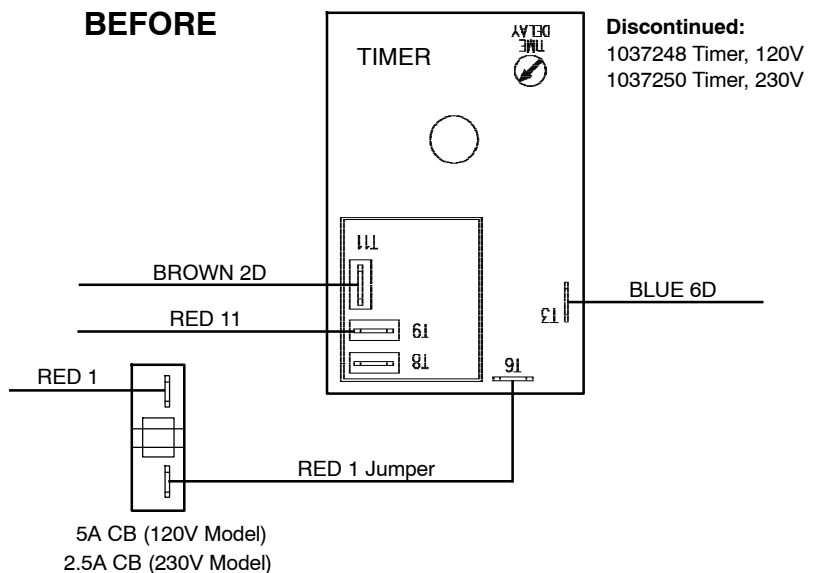

AFTER

