



CREATING A CLEANER, SAFER, HEALTHIER WORLD.

EQUIPMENT



T20

HEAVY-DUTY INDUSTRIAL SCRUBBER

- Achieve excellent cleaning results in industrial environments with aggressive scrubbing technologies
- Improve productivity with extended run times, easy brush changes and quick recovery tank draining
- Lower your cost of ownership through innovative engineering that increases productivity and reduces service and maintenance

EXCELLENT CLEANING RESULTS AT A LOWER COST OF OWNERSHIP



DRAMATICALLY LOWER YOUR COST OF OWNERSHIP

Tennant's innovations in hydraulic technology, tank clean-out and engine accessibility reduce service and maintenance costs, and unproductive downtime.


INCREASE OPERATOR COMFORT AND SAFETY

Set a new standard of safety while minimising the risk of damage to your machine and facility with an ergonomically designed, forward facing operator compartment, heavy-duty frame with Grip-N-Go™ corner rollers, and ec-H2O™ and FaST® technologies for drier, safer floors.

IMPROVE YOUR PRODUCTIVITY

Longer run times, easy brush changes and quick recovery tank draining makes the T20 a machine you can depend on every day of the week.

INSIDE THE T20

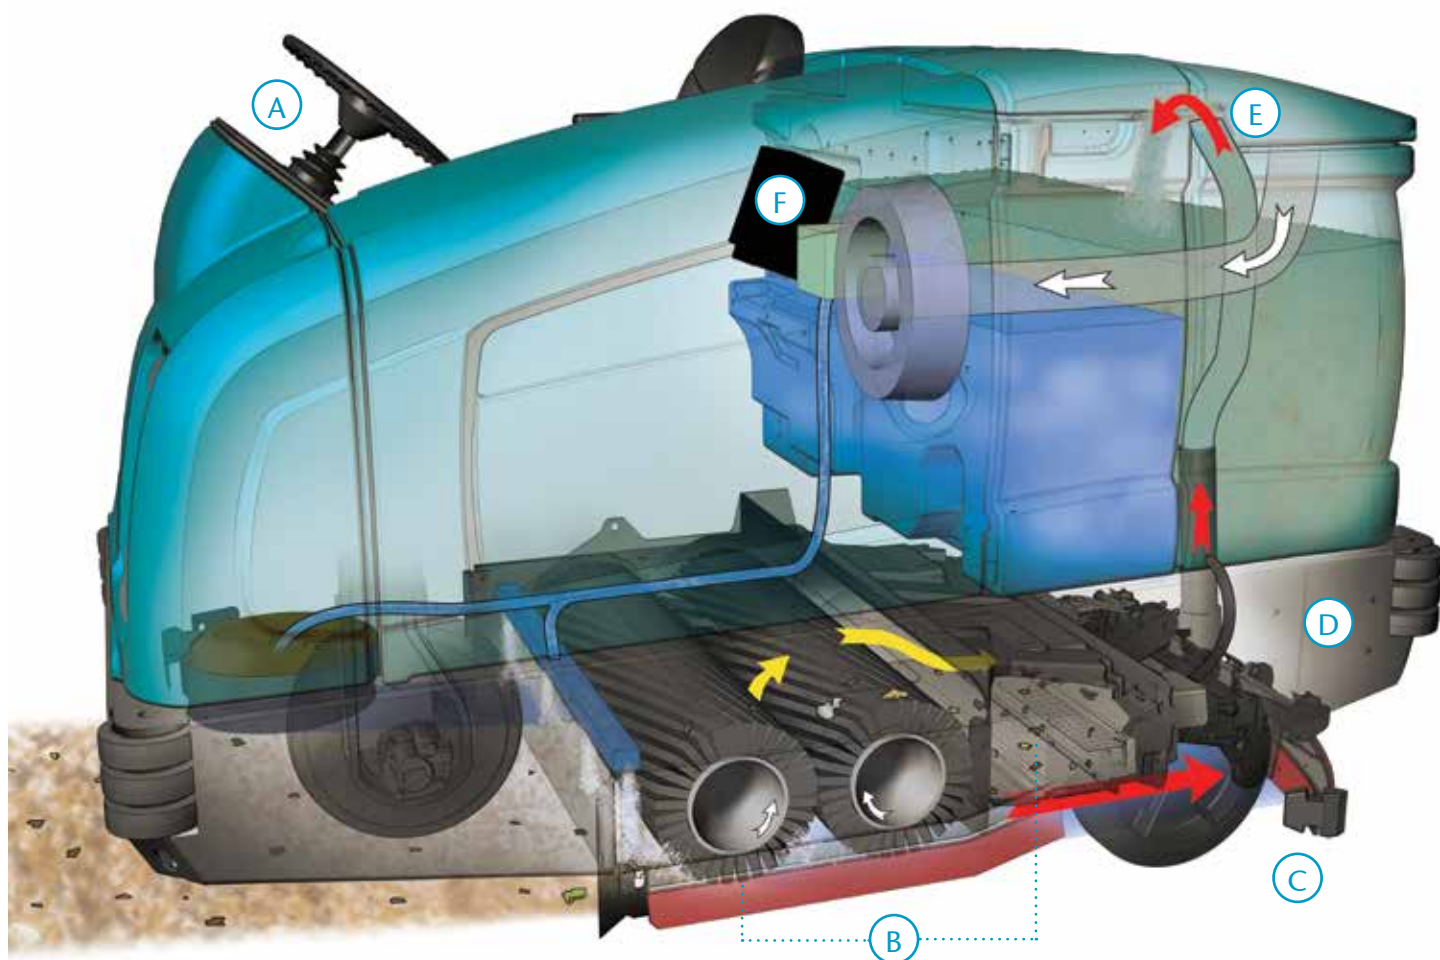


- A** Simplify training with the Touch-N-Go™ Control module featuring 1-step™ scrubbing.
- B** Maximise productivity with cylindrical brushes and EZ-Remove™ debris tray.

- C** Maximise water pick-up and reduce maintenance time with the Dura-Track™ squeegee with SmartRelease™.
- D** Count on durable, steel frame and Grip-N-Go™ corner rollers to withstand the toughest environments and protect your machine and facility.

- E** Quickly and easily clean solution and recovery tanks with easy-access Hygenic® tanks.
- F** Reduce environmental impact* with ec-H2O™ or FaST™ technologies.

* Based on a study by EcoForm™. Visit www.tennantco.com for more information.

COST EFFECTIVE AND PRODUCTIVE



BRUSH OPTIONS

Achieve outstanding cleaning results in the harshest industrial environments with dual cylindrical brushes or three gimble mounted disk brushes for aggressive cleaning.



SQUEEGEE PROTECTION KIT

Lower maintenance and repair costs with a heavy-duty rear squeegee protection kit that prevents damage to the machine.



EZ-REMOVE DEBRIS TRAY

EZ-Remove™ debris tray glides in and out on wheels, improving productivity and operator safety. The convenient and sturdy handle simplifies debris transport and disposal.



EASY OPEN SERVICE

EasyOpen™ service access allows you to quickly and easily access the internal parts of the machine, reducing service and maintenance costs.



EXCLUSIVE TECHNOLOGIES

The T20 is available with additional exclusive technologies FaST® and ES® Extended Scrubbing. These technologies increase scrub time up to three times using a single tank of water.

T20 HEAVY-DUTY INDUSTRIAL FLOOR SCRUBBER

SCRUBBING SYSTEM

| | |
|---------------------------|----------|
| Cleaning path | |
| Cylindrical main brushes | 1,020 mm |
| Disk main brushes | 1,070 mm |
| With scrubbing side brush | 1,370 mm |
| With sweeping side brush | 1,420 mm |

BRUSH DRIVE SYSTEM

| | |
|------------------------------|---------|
| Disk main brushes | |
| Brush rpm | 230 rpm |
| Down pressure weight (up to) | 181 kg |
| Brush diameter (3) | 360 mm |
| Cylindrical main brushes | |
| Brush rpm | 480 rpm |
| Down pressure weight (up to) | 177 kg |
| Brush diameter (2) | 300 mm |
| Disk side brush | |
| Brush rpm | 150 rpm |
| Brush diameter | 410 mm |
| Sweeping brush diameter | 530 mm |

SOLUTION DELIVERY SYSTEM

| | |
|----------------------------|-------|
| Solution tank capacity | 303 L |
| Solution capacity with ES® | 473 L |

RECOVERY SYSTEM

| | |
|------------------------|------------|
| Recovery tank capacity | 360 L |
| Demisting chamber | 57 L |
| Debris tray | |
| Volume capacity | 31 L |
| Weight capacity | 50 kg |
| Vacuum fan | |
| Speed | 11,000 rpm |
| Water lift | 890 mm |

PROPELLING SYSTEM

| | |
|------------------------------------|-----------|
| Propel speed forward (variable to) | 13 km/h |
| Propel speed reverse (variable to) | 6.4 km/h |
| Engine-petrol/LPG (2.0 L) | 37.2 kW |
| Engine-diesel (1.5 L) | 28 kW |
| Gradeability | |
| Transport at gross weight | 10° / 18% |
| Working (scrubbing) | 8° / 14% |
| Ground clearance | 76 mm |

MACHINE SPECIFICATIONS

| | |
|---------------------|----------|
| Length | 2,410 mm |
| Width | |
| Frame | 1,270 mm |
| Rear squeegee | 1,300 mm |
| With side brush | 1,470 mm |
| Height | 1,470 mm |
| With overhead guard | 2,120 mm |
| Weight (empty) | 1,497 kg |
| Minimum aisle turn | 2,790 mm |

WARRANTY

See your local representative for warranty information.

*Specifications subject to change without notice.

SEEING IS BELIEVING

For a demonstration or additional information,
send an email to contactus@tennantco.com

Tennant Australia

Toll Free: 1800 226 843
Ph: +61 2 8718 9718

www.tennantco.com.au
contactus@tennantco.com

Tennant New Zealand

Ph: +64 9 253 9013

www.tennantco.co.nz
contactus@tennantco.com