

550/1550

## Large-Area Industrial Rider Scrubber

- Maximize productivity in large-scale applications with massive tanks and aggressive scrubbing
- Superior construction with durable stainless steel tanks for years of worry-free cleaning
- Unmatched maneuverability with unique articulated steering capability



## Unmatched performance from a reliable large-area scrubber.

Delivering up to 10 hours of productive cleaning, the 550 combines dual cylindrical brushes that scrub and pick up light debris with massive solution and recovery capacity for unmatched results in large area cleaning.

### CONSISTENTLY CREATE A CLEAN & SAFE ENVIRONMENT

#### **Dependable industrial-strength cleaning**

Engineered to withstand even the harshest environments, both indoors and out, the rugged steel construction with corrosion-resistant stainless steel tanks and debris tray are built to last.

#### **Maximum maneuverability, minimum maintenance**

With the 550/1550's articulated power steering, easily maneuver through tight, congested areas.

#### **Versatility and flexibility for the toughest jobs**

The 550/1550 excels in conventional scrubbing environments, yet is also uniquely suited for specialty needs such as large spill or glycol recovery applications.




### MAXIMUM PRODUCTIVITY FOR YOUR BIGGEST JOBS

The 1550 SRS offers all the benefits of the 550, with the added benefits from an enormous 510 gal / 1931 L solution tank:

- 12x greater scrubbing coverage than all other standard scrubbers;
- Up to 10 hours continuous scrubbing time;
- Safe and efficient pick-up of de-icing fluid (glycol) from airport tarmacs.



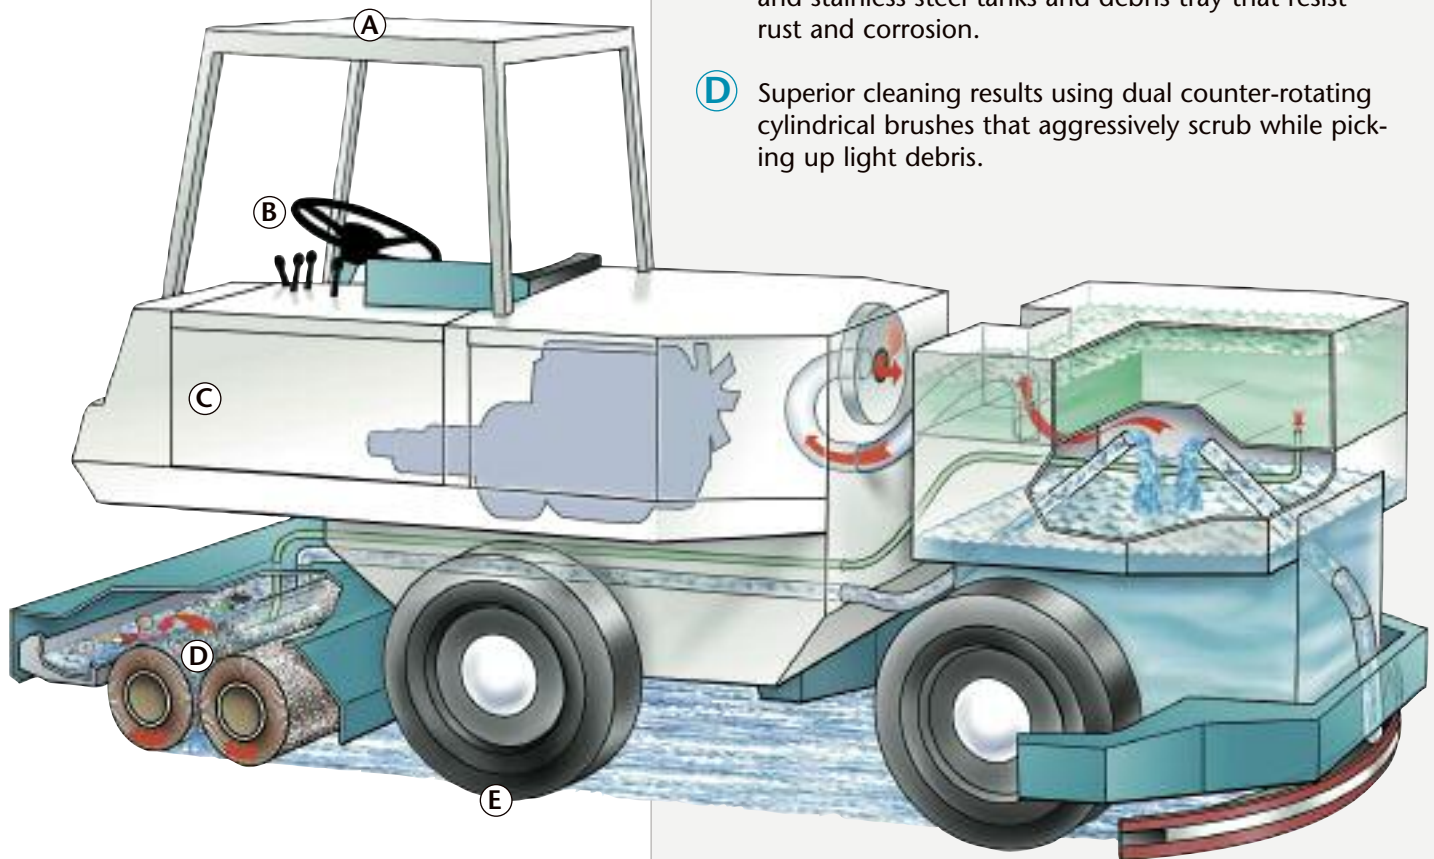


- Ⓐ Protect the operator and machine with an overhead guard or heated cab.
- Ⓑ Unmatched maneuverability, even in congested areas, from articulated power steering system.
- Ⓒ Long-life construction from heavy-gauge steel frame and stainless steel tanks and debris tray that resist rust and corrosion.
- Ⓓ Superior cleaning results using dual counter-rotating cylindrical brushes that aggressively scrub while picking up light debris.



- Ⓔ Protect fragile floor surfaces from damage with standard load range D tires with low PSI foot print.

- Ⓕ Increase productivity with optional SRS® for hours of continuous scrubbing.

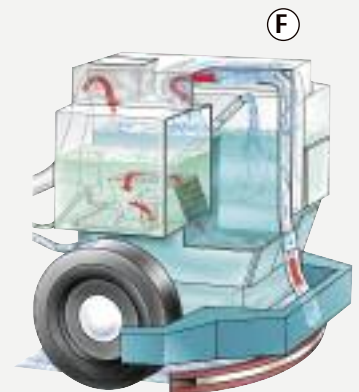



## OPTIMIZE CLEANING PERFORMANCE WITH TENNANTTRUE®

Maximize the uptime and life of your Tennant equipment with TennantTrue parts and service. Benefit from the unmatched knowledge of our team of over 400 factory-trained and certified Tennant Service Reps. Improve productivity with quality parts and supplies that are designed to enhance performance and durability. Depend on TennantTrue to help you maximize the effectiveness of cleaning operations.

*Choose GE Capital, U.S. Bancorp, or All-Line Leasing for simple, quick financing with flexible upgrade options.*

## 550/1550 RIDING POWER SCRUBBER

FEATURES	550	1550
<b>Scrubbing System</b>		
Cleaning path	50 in/1270 mm	50 in/1270 mm
Solution tank	n/a	510 gal/1931 L
Solution recycling tank (SRS®)	260 gal/984 L	n/a
Main brush		
Speed	370 rpm	370 rpm
Down pressure	500-650 lbs/227-295 kg	650 lbs/295 kg
Brush diameter	11 in/280 mm	11 in/280 mm
Brush length	50 in/1270 mm	50 in/1270 mm
Debris hopper		
Volume capacity	2.6 ft³/74 L	2.6 ft³/74 L
<b>Recovery System</b>		
Recovery tank capacity	120 gal/454 L	510 gal/1931 L
Vacuum fan speed	11,500 rpm	11,500 rpm
Vacuum water lift	51 in/1300 mm	51 in/1300 mm
Recycling filters (2)		Laminar flow filters
<b>Propelling System</b>		
Propel speed forward (variable to)	9 mph/14 km/h	9 mph/14 km/h
Propel speed reverse (variable to)	5 mph/8 km/h	7 mph/11 km/h
Engine		
LP	72 hp/54 kW	
Diesel	65 hp/48 kW	65 hp/48 kW
Gradeability		
Working (scrubbing)	8 deg	7.5 deg
<b>Dimensions/Weights</b>		
Product length	156 in/3960 mm	198 in/5030 mm
Product width	61 in/1550 mm	61 in/1550 mm
Product height		
Without overhead guard	61 in/1550 mm	61 in/1550 mm
With overhead guard	84 in/2130 mm	84 in/2130 mm
Product weight		
Gross, empty	4710 lbs/2136 kg	5840 lbs/2649 kg
Gross, full	7200 lbs/3266 kg	11,300 lbs/5126 kg
Minimum aisle turn (left)	191 in/4850 mm	251 in/6400 mm

See your local representative for warranty information

Specifications subject to change without notification

## SEEING IS BELIEVING

See for yourself how the 550/1550 power scrubber delivers clean, safe floors in your most challenging environment. For a demonstration or additional information, call **800.553.8033**.

### Tennant

701 North Lilac Drive  
Minneapolis, MN 55422 USA

USA/Canada: +1.800.553.8033  
Quebec: +1.800.361.9050  
Overseas: +1.763.540.1315

www.tennantco.com  
info@tennantco.com