



REINVENT HOW THE WORLD CLEANS







# T600e

## Industrial-strength floor scrubber

Delivering exceptional cleaning performance and reliability even in the toughest environments.

### Available technologies

-  ec-H2O NanoClean® technology
-  IRIS® Asset Manager
-  Smart-Fill™ Automatic Battery Watering
-  High capacity battery power sources

# Productive & versatile



1



4




2



5



3

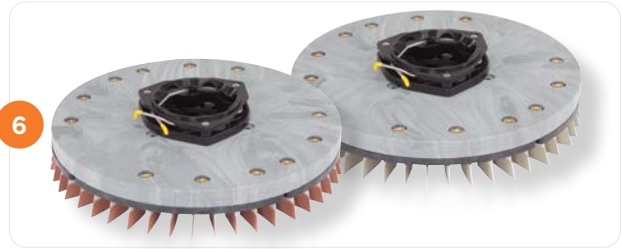

6

## 1. Yellow Debris Tray

Helps prevent machine clogging.

## 2. Productivity-Boosting

Maximize battery life and run-time with the optional Smart-Fill™ automatic battery watering system.

## 3. Yellow Touch Points

Save time and ensure proper maintenance with yellow touch points.

## 4. Squeegee Integrated P-trap

Virtually eliminate water drips after cleaning with an integrated p-trap.

## 5. Recovery Hose

Pinch-style recovery hose helps control dirty water flow.

## 6. Diamabrush™ Technology

Help floors battered by grime and filth look like-new with optional Diamabrush tools.

## Get the performance you need

The T600e scrubbers have multiple machine head types to fit your cleaning applications and optimize cleaning performance for specific areas.



### Cylindrical:

28 in / 700 mm &  
32 in / 800 mm



### Dual disk:

28 in / 700 mm &  
32 in / 800 mm &  
36 in / 900 mm

# Inside the T600e



## 1. Simplify Operation

Easy-to-understand controls featuring variable speed control bail, propel toggle and speed setting within easy reach.

## 2. Convenient Charger

Charge anywhere with the convenient on-board charger.

## 3. Foot Activated Squeegee

Easily and ergonomically lower and raise the foot activated squeegee.

## 4. Drain Tube

Safely control the removal of excess fluids via the battery compartment drain tube.

## 5. Easy Access

To solution filter bowl makes cleanout simple and quick.

## 6. Foam Filled or Pneumatic Tires

Increase traction with tires with enhanced grip.

## 7. Yellow Plunger

Easily remove scrub head brushes with yellow plunger.

# T600e specifications

	DUAL DISK			CYLINDRICAL	
	28 IN/700 MM	32 IN/800 MM	36 IN/900 MM	28 IN/700 MM	32 IN/800 MM
Productivity (per hour) Theoretical Max	36,960 ft <sup>2</sup> /hr / 3,434 m <sup>2</sup> /hr	42,240 ft <sup>2</sup> /hr / 3,924 m <sup>2</sup> /hr	47,520 ft <sup>2</sup> /hr / 4,415 m <sup>2</sup> /hr	36,960 ft <sup>2</sup> /hr / 3,434 m <sup>2</sup> /hr	42,240 ft <sup>2</sup> /hr / 3,924 m <sup>2</sup> /hr
Estimated Coverage* Conventional	24,005 ft <sup>2</sup> /hr / 2,230 m <sup>2</sup> /hr	27,698 ft <sup>2</sup> /hr / 2,573 m <sup>2</sup> /hr	31,391 ft <sup>2</sup> /hr / 2,916 m <sup>2</sup> /hr	24,005 ft <sup>2</sup> /hr / 2,230 m <sup>2</sup> /hr	27,698 ft <sup>2</sup> /hr / 2,573 m <sup>2</sup> /hr
Estimated Coverage* ec-H2O NanoClean®	28,863 ft <sup>2</sup> /hr / 2,681 m <sup>2</sup> /hr	33,304 ft <sup>2</sup> /hr / 3,094 m <sup>2</sup> /hr	34,964 ft <sup>2</sup> /hr / 3,248 m <sup>2</sup> /hr	28,863 ft <sup>2</sup> /hr / 2,681 m <sup>2</sup> /hr	33,304 ft <sup>2</sup> /hr / 3,094 m <sup>2</sup> /hr
Scrub motor	2 x 36 VDC, 1.0 hp/.75 kW			2 x 36 VDC, .9 hp/.67 kW	
Brush/pad RPM	300 rpm			760 rpm	
Brush/pad pressure	100, 150, 200 lbs / 45, 68, 90 kg	100, 150, 200, 300 lbs / 45, 68, 90, 136 kg	100, 150, 200 lbs / 45, 68, 90 kg	50, 70, 90 lbs / 23, 32, 41 kg	
Solution tank capacity	32 gal / 121 L			32 gal / 121 L	
Recovery tank capacity	37 gal / 140 L			37 gal / 140 L	
Vacuum motor	36 VDC, 0.75 hp/.56 kW, 15.6 A			36 VDC, 0.75 hp/.56 kW, 15.6 A	
Vacuum waterlift	50 in / 1,270 mm			50 in / 1,270 mm	
System voltage	36 volt			36 volt	
Battery run time (up to hours)***	5.4	5.3	5.3	6.9	6.1
Battery option packages	Wet 240 AH   Wet 360 AH 210 AH Thin Plate Pure Lead (TPPL) *****				
Length x width x height	63.7 x 30.1 x 43.6 in / 1,617 x 764 x 1,107 mm	65.8 x 33.7 x 43.6 in / 1,617 x 856 x 1,107 mm	69.3 x 37.6 x 43.6 in / 1,761 x 955 x 1,107 mm	64.4 x 31.2 x 43.6 in / 1,637 x 792 x 1,107 mm	64.4 x 35.1 x 43.6 in / 1,637 x 892 x 1,107 mm
Weight (with Batteries)	1,033 lb/470 kg	1,036 lb/471 kg	1,040 lb/473 kg	1,049 lb/477 kg	1,052 lb/478 kg
Sound level (operator's ear)****	69.5 dBA			69.2 dBA	

T600e\*\*\*\*\* - approvals (U.S./Canada only) - ETL Listed to UL 583 Type E



ec-H2O NanoClean® technology is NFSI (National Floor Safety Institute) Certified



ec-H2O NanoClean technology is registered by NSF International

\*Estimated coverage rates use the practical speed and empty/fill time standards from the 2014 ISSA 612 Cleaning Times & Tasks handbook.

\*\*Only available in the U.S. and Canada.

\*\*\*Up to run-times are based on continuous scrubbing run-times, 360AH batteries, low down pressure, ec-H2O off.

\*\*\*\*Sound levels per ISO 11201 as recommended by the American Association of Cleaning Equipment manufacturers & OSHA.

\*\*\*\*\*Does not include - ec-H2O NanoClean or Smart-Fill options.

Specifications subject to change without notice.

## Tennant – Reinvent how the world cleans

With a vision to become a global leader in sustainable cleaning innovation that empowers our customers to create a cleaner, safer and healthier world, Tennant creates solutions that are changing the way the world cleans.



### We are where you are

Tennant has the industry's largest direct sales and service organization and a well-supported network of authorized distributors worldwide.



### Solutions for your unique needs

Whatever your cleaning needs, Tennant offers a variety of high quality equipment to help you increase your cleaning productivity.



### Buying, leasing, renting

We offer flexible options to get you the machines you need, however you need them.



### TennantTrue®

Optimize equipment performance and protect your investment with TennantTrue® parts and service.

For a demonstration or additional information, call **+1.800.553.8033** or email **info@tennantco.com**

### Tennant Company

10400 Clean Street  
Eden Prairie, MN 55344-2650, USA

USA/Canada: +1.800.553.8033

Quebec: +1.800.361.9050

Overseas: +1.763.540.1315

www.tennantco.com | info@tennantco.com