



# INSTRUCTION BULLETIN

No. 340134  
Machine: 4300  
Published: 04-2009  
Rev: 01

**NOTE: DO NOT DISCARD the Parts List from the Instruction Bulletin. Place the Parts List in the appropriate place in your machine manual for future reference. Retaining the Parts List will make it easier to reorder individual parts and will save you the cost of ordering an entire kit.**

*NOTE: Numbers in parenthesis ( ) are reference numbers for parts listed in Bill of Materials.*

Installation instructions for kit number 367609

## **SYNOPSIS / PROBLEM:**

This kit contains the parts needed to install a fire protection kit on the model 4300 sweeper.  
Please follow step-by-step instructions.

## **SPECIAL TOOLS / CONSIDERATIONS:** None


(Estimated time to complete: 0.5 hour)

## **INSTALLATION:**


(Refer to FIG. 1, 2 and 3)

**FOR SAFETY: Before leaving or servicing machine, stop on level surface and set parking brake. Then turn off machine and remove key.**


1. Locate, mark, and drill the Thermo-Sentry switch (1) mount holes in the front of the hopper cover. (Refer to FIG. 1 for dimensions)
2. Mount the Thermo-Sentry switch (1) and the gasket (6) in the new mount holes using 2 hex screws (2), four washers (3), and two nyloc nuts (4). Hand tighten. (Refer to FIG. 2)
3. Install the indicator lamp (5) into the open slot (*4th from the left*) in the dash panel.
4. Remove the jumper wire and connect wires (15/BRN, 20/BRN, and 13V/BLK) to the Thermo-Sentry switch (1) at the front of the hopper cover. (Refer to FIG. 3)
5. Connect wires (15/BRN and 3A/BLU) to the indicator lamp (5) in the dash panel. (Refer to FIG. 3)

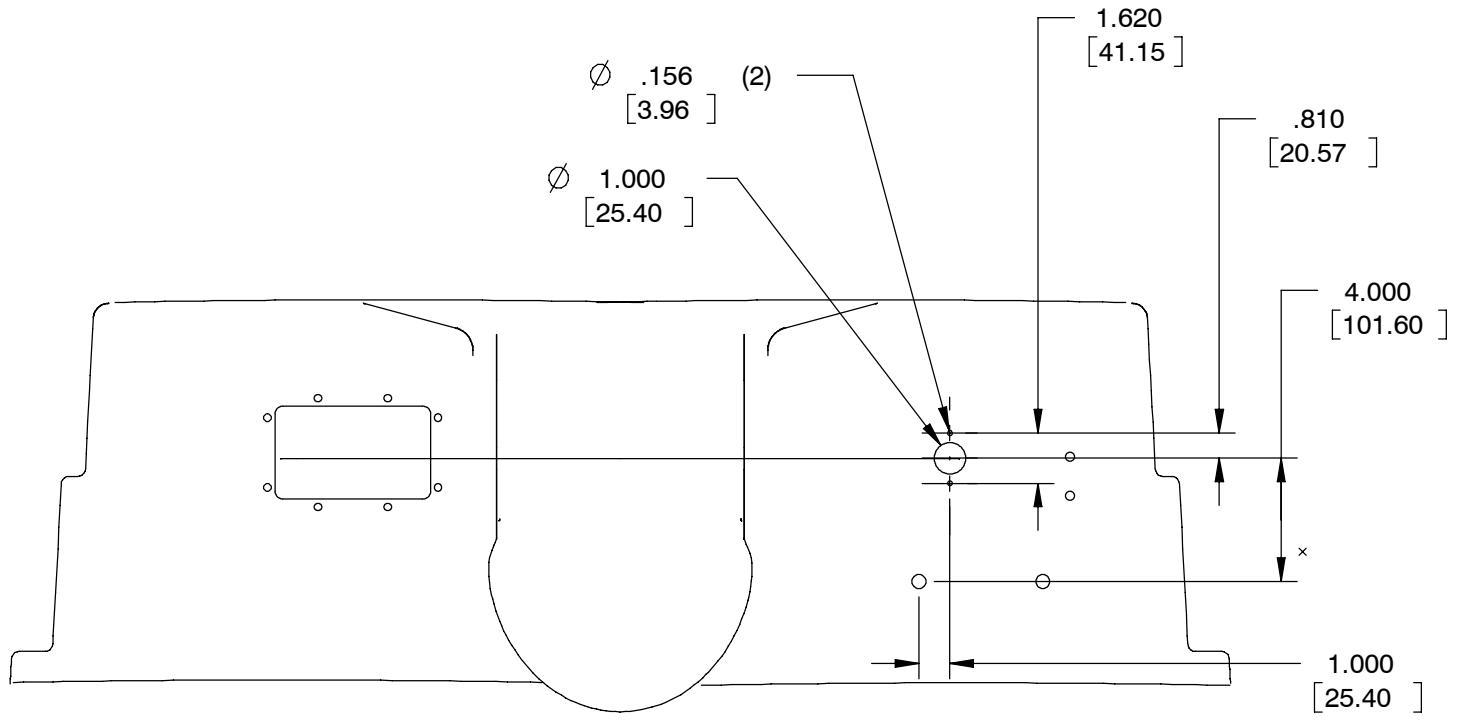

**FIG. 1 - Hole Location For Thermo Sentry**

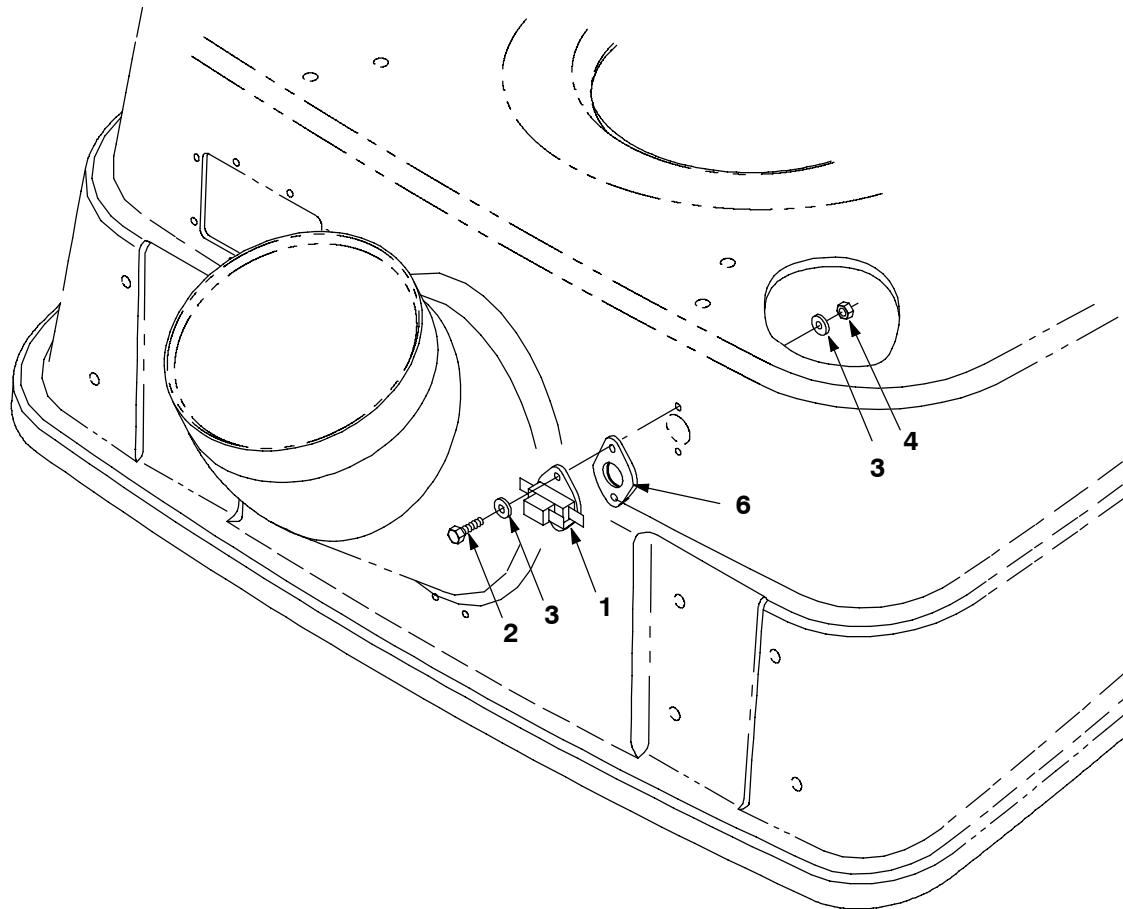

**FIG. 2 - Hopper Cover And Thermo-Sentry Assembly**

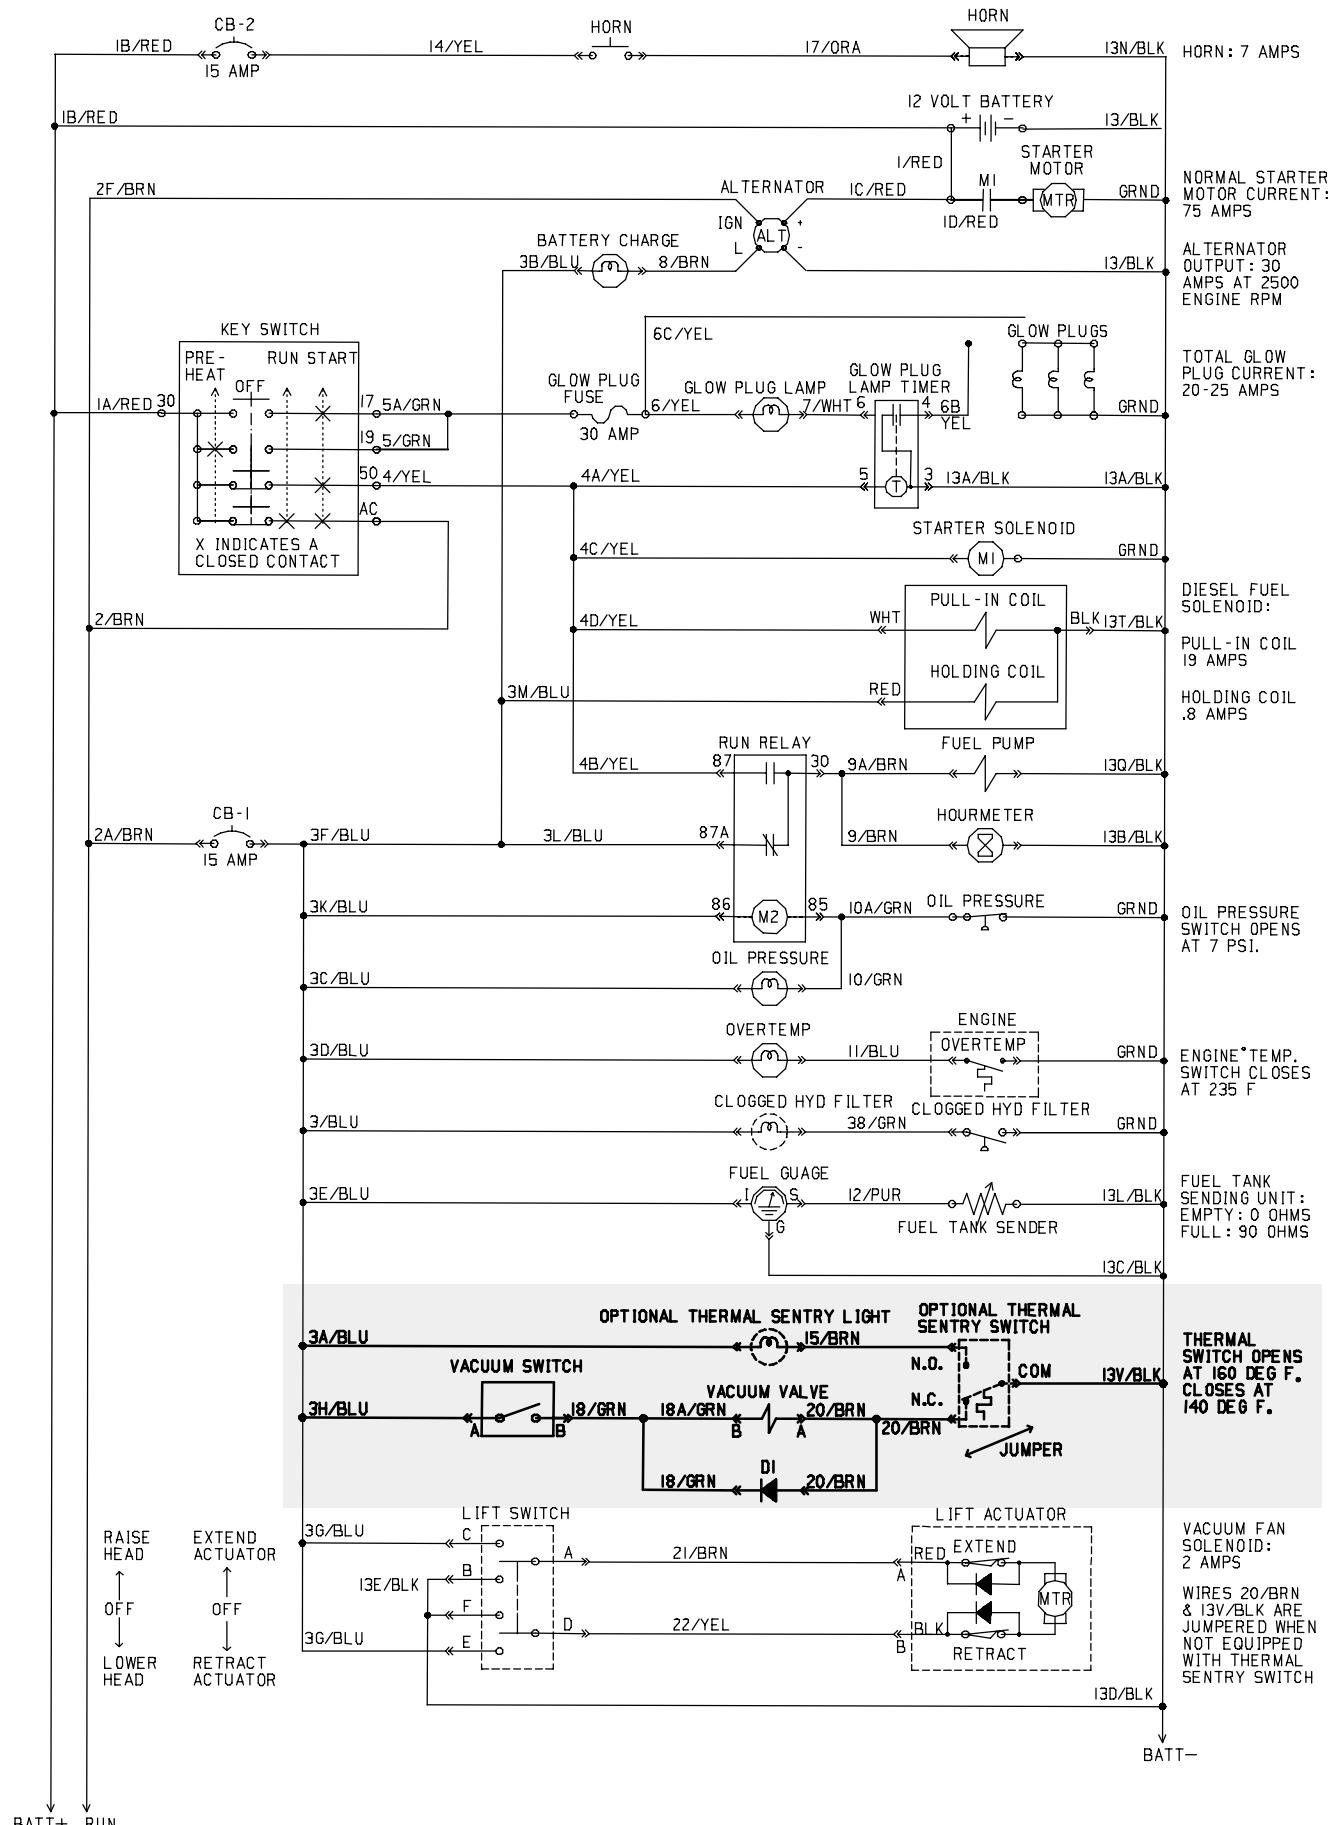

**FIG. 3 - Electrical Schematic (Thermo-Sentry area highlighted)**

## BILL OF MATERIALS FOR FIRE PROTECTION KIT 367609

Ref.	Tenant Part No.	Machine Serial Number	Description	Qty.
▽	367609	(000000-	) Fire Protection Kit	1
▲	1 367679	(000000-	) Thermostat, Spdt Switch	1
▲	2 09228	(000000-	) Screw, Hex, M04-0.7 X 20, 8.8	2
▲	3 41579	(000000-	) Washer, Flat, #08 Ss	4
▲	4 33932	(000000-	) Nut, Hex, Lock, M04-0.7, NI,Ss	2
▲	5 361075	(000000-	) Indicator Lamp	1
▲	6 82733	(000000-	) Gasket Sensor, Thermal	1

TENNANT COMPANY  
P. O. Box 1452  
Minneapolis, MN 55440-1452