



INSTRUCTION BULLETIN

No. 9008652
Machine: Various
Models
Published: 02-2011
Rev. 00

NOTE: DO NOT DISCARD the Parts List from the Instruction Bulletin. Place the Parts List in the appropriate place in the machine manual for future reference. Retaining the Parts List will make it easier to reorder individual parts and will save the cost of ordering an entire kit.

NOTE: Numbers in parenthesis () are reference numbers for parts listed in Bill of Materials.

Installation instructions for **kit number 9004588**

SYNOPSIS:

This kit contains the parts needed to replace a 15-Amp circuit breaker on various Tennant machines. Please follow step-by-step instructions.

SPECIAL TOOLS / CONSIDERATIONS: NONE

(Estimated time to complete: 20 - 60 minutes)

PREPARATION:

1. Park the machine on a clean level surface, turn off the machine, remove the key, and set the parking brake (if machine is equipped with a parking brake).

FOR SAFETY: Before leaving or servicing machine, stop on level surface, turn off machine, and remove key.

2. Disconnect the battery cables from the batteries.



WARNING: Always disconnect battery cables from machine before working on electrical components.

INSTALLATION:

1. Remove any components and hardware necessary to access the 15-Amp circuit breaker needing to be replaced.
2. Remove the 15-Amp circuit breaker and boot from the electrical panel / control panel / circuit breaker panel.
3. Install the new 15-Amp circuit breaker (1) and circuit breaker boot (2) into the electrical panel / control panel / circuit breaker panel. If necessary, use the lock washer (3) if the circuit breaker is loose on the panel. Discard the lock washer if the circuit breaker fits securely on the panel. Refer to Fig. 1.
4. Reinstall any items removed to access the 15-Amp circuit breaker.
5. Reconnect the battery cables to the batteries.
6. Start and test the machine.

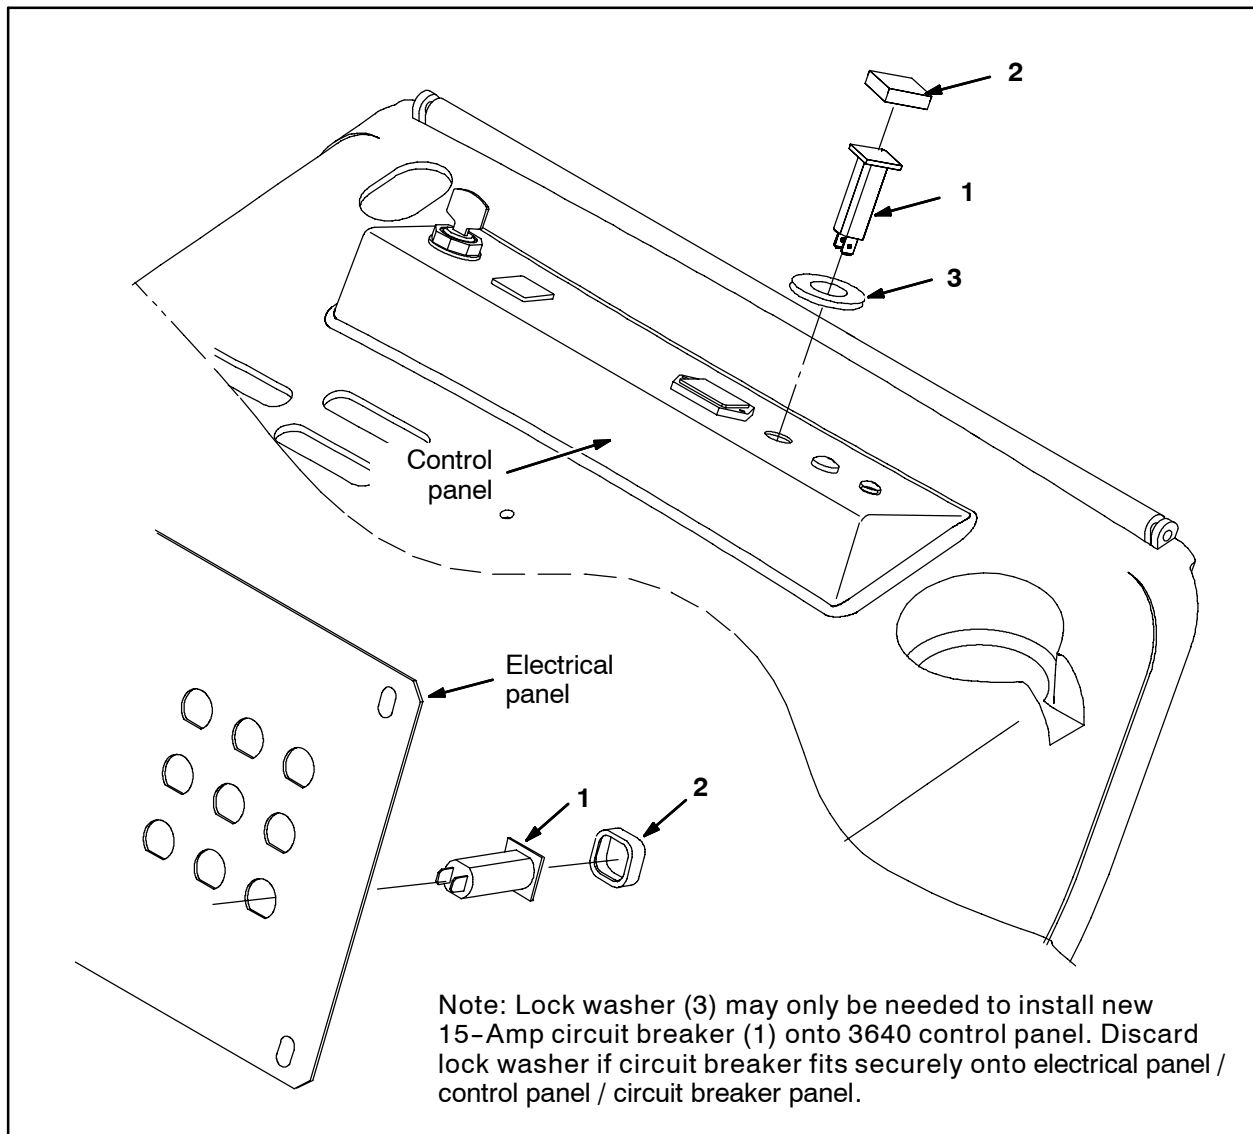


FIG. 1

Bill Of Materials For Circuit Breaker Kit, 15A, Replmt - 9004588

	Ref.	Tennant Part No.	Description	Qty.
▽		9004588	Circuit Breaker Kit, 15A, Replmt	1
▲	1	1064188	Circuit Breaker, 15.0A, Resettable	1
▲	2	1064191	Boot, Circuit Breaker	1
▲	3	1064190	Washer, Lock, Int, 0.60, Stl	1

TENNANT COMPANY
P. O. Box 1452
Minneapolis, MN 55440-1452